



Vaughan®

Vaughan E Series Chopper Pump PERFORMANCE CURVE


Models:
V3P
V3PR

3-Blade Impeller
3" Discharge
6" Suction

CURVE	POWER (HP/KW)	SPEED (RPM)	IMPELLER DIAMETER
A	60 / 45*	2900	10.30" (262 mm)
B	60 / 45	2900	10.00" (254 mm)
C	50 / 37	2900	9.50" (241 mm)
D	40 / 30	2900	9.00" (229 mm)
E	40 / 30	2900	8.50" (216 mm)
F	30 / 22**	2900	8.00" (203 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B. *EXCEEDS 60 HP AFTER 139 M³/HR. **EXCEEDS 25 HP AFTER 110 M³/HR.

CAPACITY (U.S. GALLONS PER MINUTE)

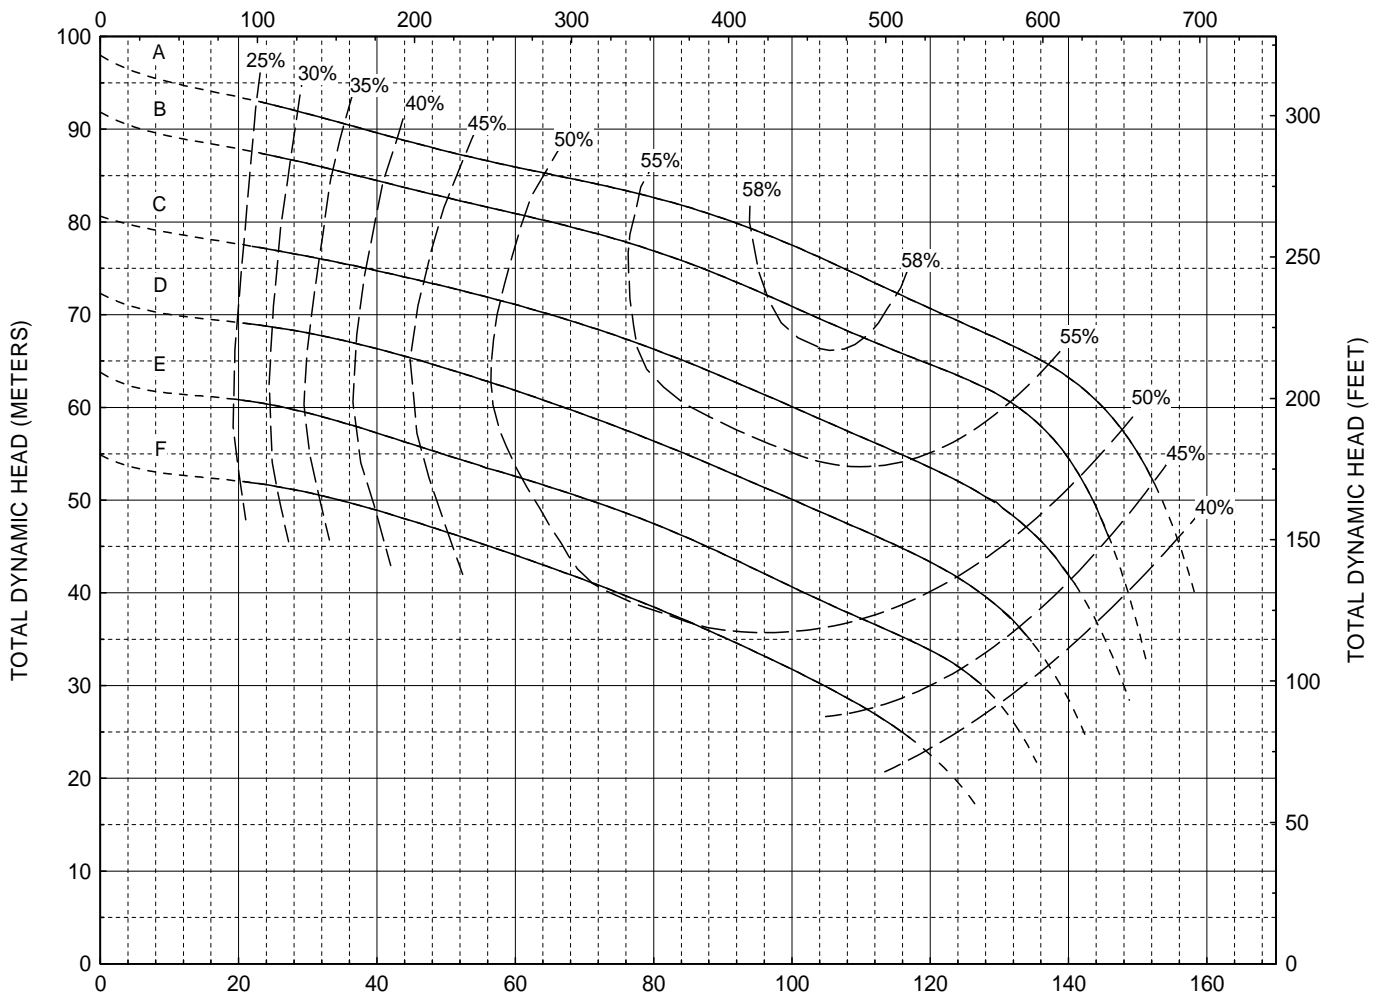

CAPACITY (CUBIC METERS PER HOUR)

Form V242XE-3P-2900 5/11