



Vaughan E Series Chopper Pump PERFORMANCE CURVE


Models:
HE4L6
PE4L6
SE4L

Back-Pull-Out Casing
4-Blade Impeller
4" Discharge
6" Suction

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20	1740	8.90" (226 mm)
B	20	1740	8.50" (216 mm)
C	15	1745	8.30" (211 mm)
D	15	1745	8.00" (203 mm)
E	10	1755	7.50" (191 mm)
F	7.5	1730	7.00" (178 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B. CURVES ARE BASED ON SUBMERSIBLE MOTOR SPEEDS.

CAPACITY (CUBIC METERS PER HOUR)

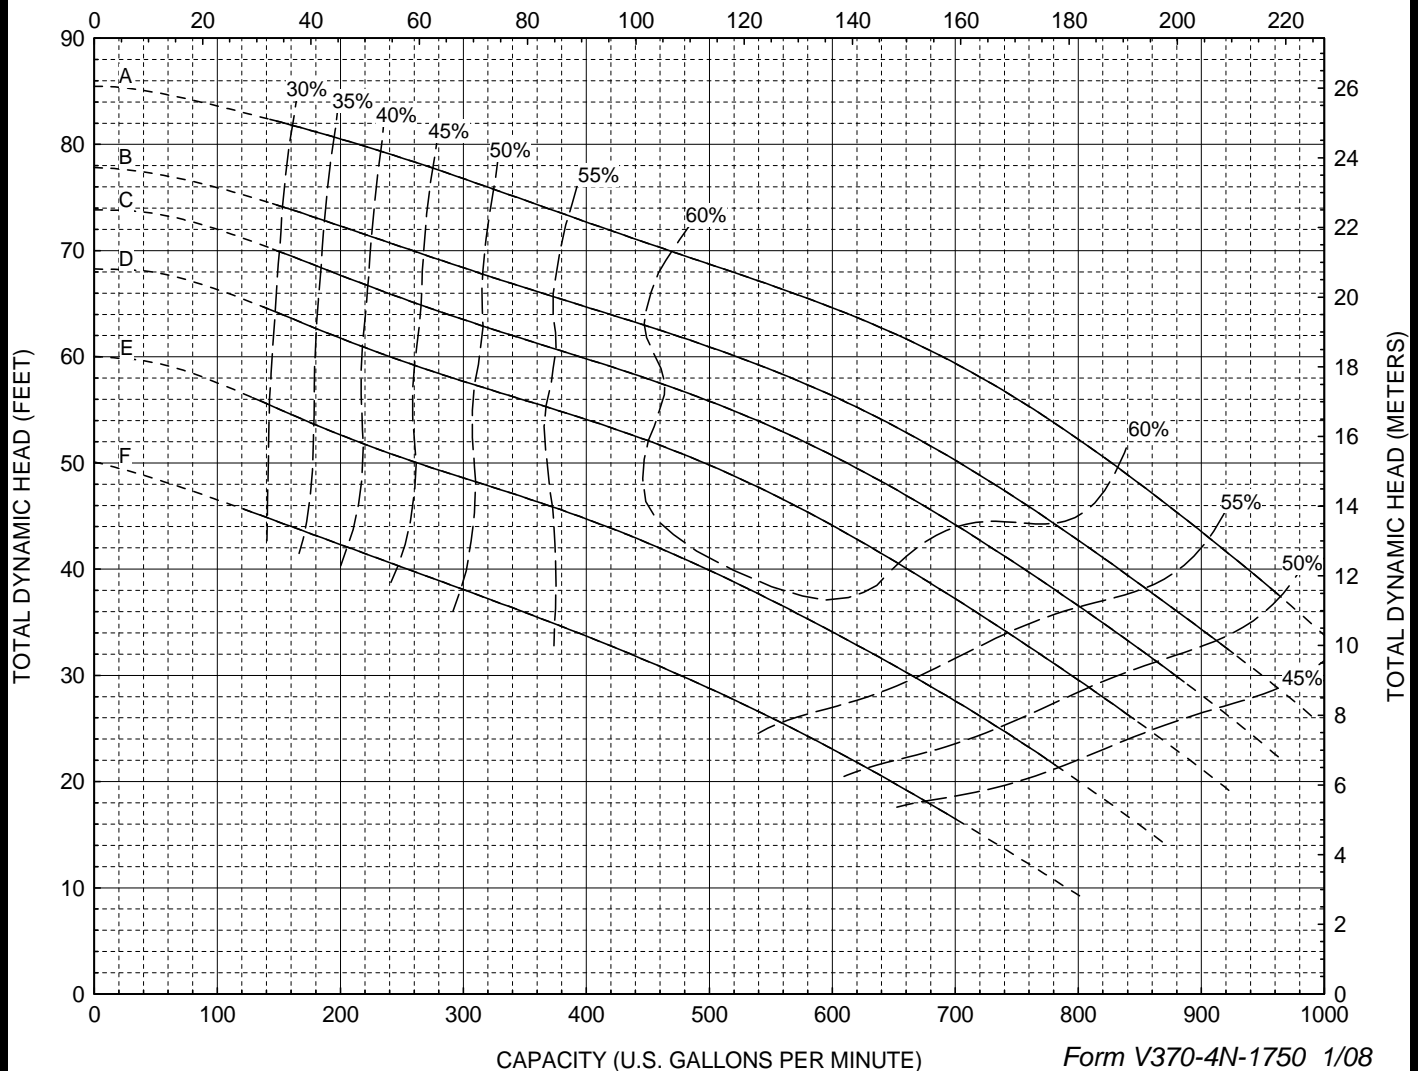

CAPACITY (U.S. GALLONS PER MINUTE)

Form V370-4N-1750 1/08