




SUBMERSIBLE CHOPPER CONDITIONING PUMP

Features:

- Portable configuration comes complete with stand for ease of installation.
- 3"-6" pumps with 5 HP – 40 HP motor and flows from 400 GPM – 1800 GPM are standard product. Larger models with higher flow rates are available.
- Conditions tank contents to prevent plugging of standard non-clog pumps and helps protect downstream equipment.
- Removes floating materials and resuspends settled solids.
- Straight, angled and double nozzle configurations available.
- Vaughan's exclusive non clog performance guarantee.
- Paint system specifically formulated to withstand severe wastewater environments.

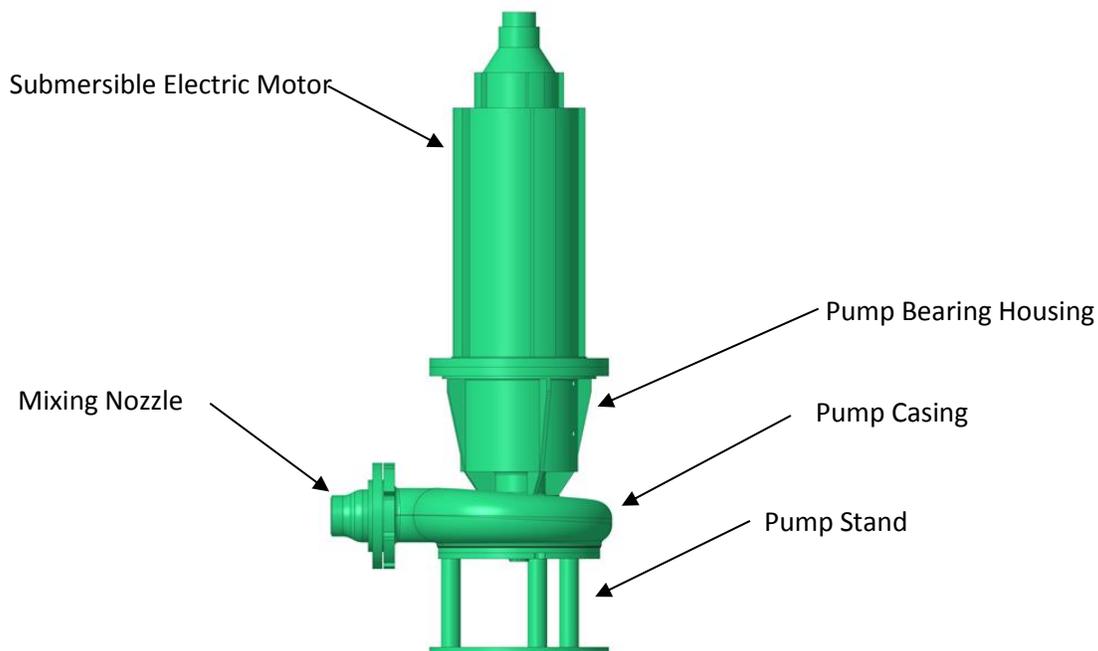

Materials of Construction:

Impeller/Upper Cutter/Cutter Bar/Cutter Nut: Cast alloy steel, heat treated to minimum Rockwell C 60.
Casing/Bearing Housing: Ductile cast iron.
Mechanical Seal: Cartridge type with silicon carbide seal faces and stainless steel sleeve.
Thrust Bearings: Back-to-back angular contact ball type.
Lubrication: ISO Grade 46 hydraulic oil.
Paint: Epoxy.

**MADE IN THE
USA**

Vaughan Company Inc.
 364 Monte-Elma Road
 Montesano, WA 98563
 1-888-249-CHOP
info@chopperpumps.com
www.chopperpumps.com

