



Vaughan

Vaughan E Series Vertical Chopper Pump PERFORMANCE CURVE

Models:

C6U (max 3' long)

V6U


V6UR

**4 Blade Impeller
6" Discharge
Tangential Casing**

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	100*	1785	11.80" (300 mm)
B	75	1780	11.50" (292 mm)
C	75	1780	11.30" (287 mm)
D	60	1780	10.90" (277 mm)
E	50	1775	10.50" (267 mm)
F	40	1775	10.00" (254 mm)
G	40**	1775	9.40" (239 mm)
H	30	1765	9.20" (234 mm)
I	25	1770	8.80" (224 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.
*EXCEEDS 75 HP BEYOND 2100 GPM. **EXCEEDS 30 HP BEYOND 1750 GPM.

CAPACITY (CUBIC METERS PER HOUR)

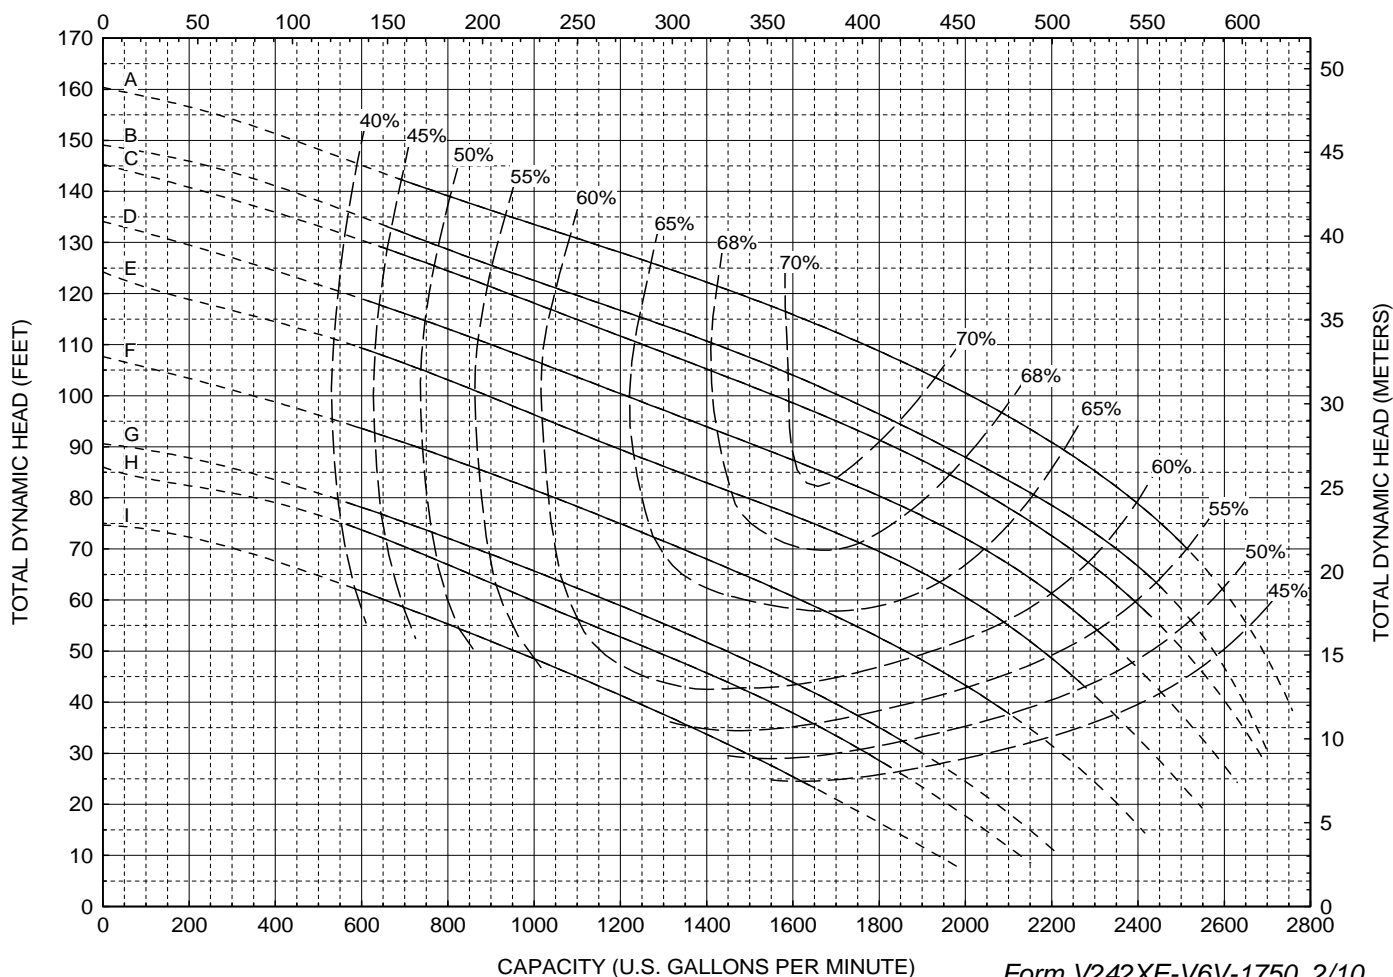

CAPACITY (U.S. GALLONS PER MINUTE)

Form V242XE-V6V-1750 2/10